



h = Separator connection height from ground (mm)

h = _____ mm

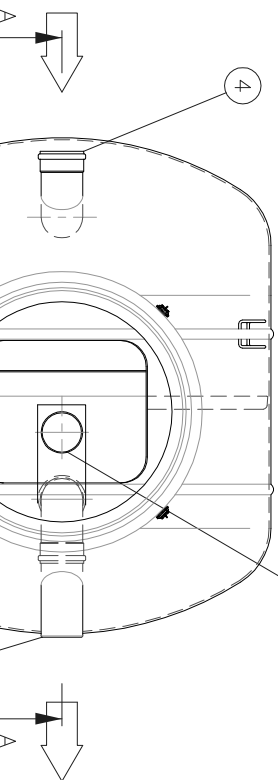

13	Ventilation outlet	PE	D110	1 pc
12	ACCESSORY: Floating adjustable cover (Ø600, 1 pc)			
	Cover 5 tn (x)	<input type="checkbox"/>	Part No. 3322 050	
	Cover 25 tn	<input type="checkbox"/>	Part No. 3322 054	
	Cover 40 tn	<input type="checkbox"/>	Part No. 3322 056	
	Frame	<input type="checkbox"/>	Part No. 3325 010	
11	EuroHUK 600 maintenance shaft (as needed)			1 pc
	h = Separator connection height from ground (mm)			
	EuroHUK 600 h = 9-13 (x)	<input type="checkbox"/>	PE plastic h = 900...1300 mm	
	EuroHUK 600 h = 13-17	<input type="checkbox"/>	PE plastic h = 1300...1700 mm	
	EuroHUK 600 h = 17-21	<input type="checkbox"/>	PE plastic h = 1700...2100 mm	
	EuroHUK 600 h = 21-25	<input type="checkbox"/>	PE plastic h = 2100...2500 mm	
10	Coalescence filter with closing valve		SS+PU	
9	Effective volume		2080 l	
8	Storage volume of sand and sludge		2000 l	
7	ACCESSORY: PEK oil alarm unit (x)	<input type="checkbox"/>		
6	Coalescence filter	PVC	D160	1 pc
5	Outlet sewer	PVC	D160	1 pc
4	Inlet sewer	PVC	D160	1 pc
3	Maintenance shaft installation sleeve	GR plastic	Ø1000	1 pc
2	Skid			
1	Material: Reinforced plastic "Lasa Composit" pH 3-10/Heat resistance 50°C			
	Ø1600, L=2400 mm			
Product: Title: PEK filter NS10+ HEK-EN 2000				
Design by: Checked by: Approved by:			Drawing no. 20ZD05aexxx	Drawing type CUSTOMER DRAWING
KK/JS			Date:	Scale:
OY LABKO AB Labkatie 1 FIN-36240 KANGASALA FINLAND Tel. +358-020-1285 200 Fax +358-020-1285 530			Construction site:	

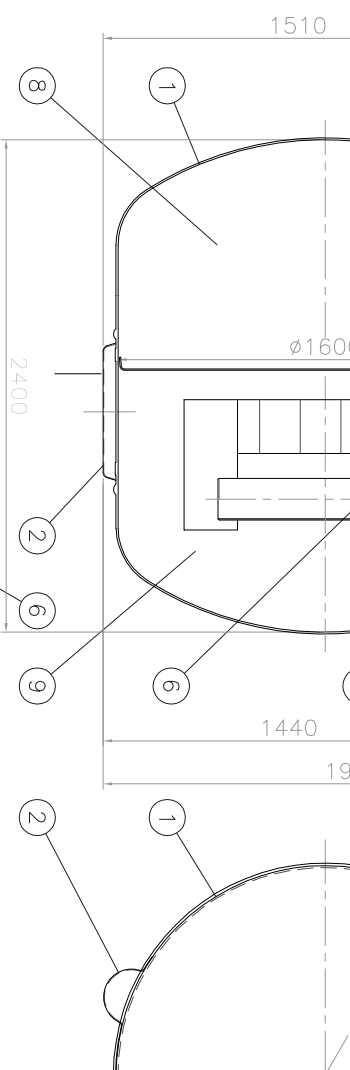

Approved by customer:

/ . 200 .